


REV.	DESCRIPTION	DATE
△		
△		

RoHS



E540931

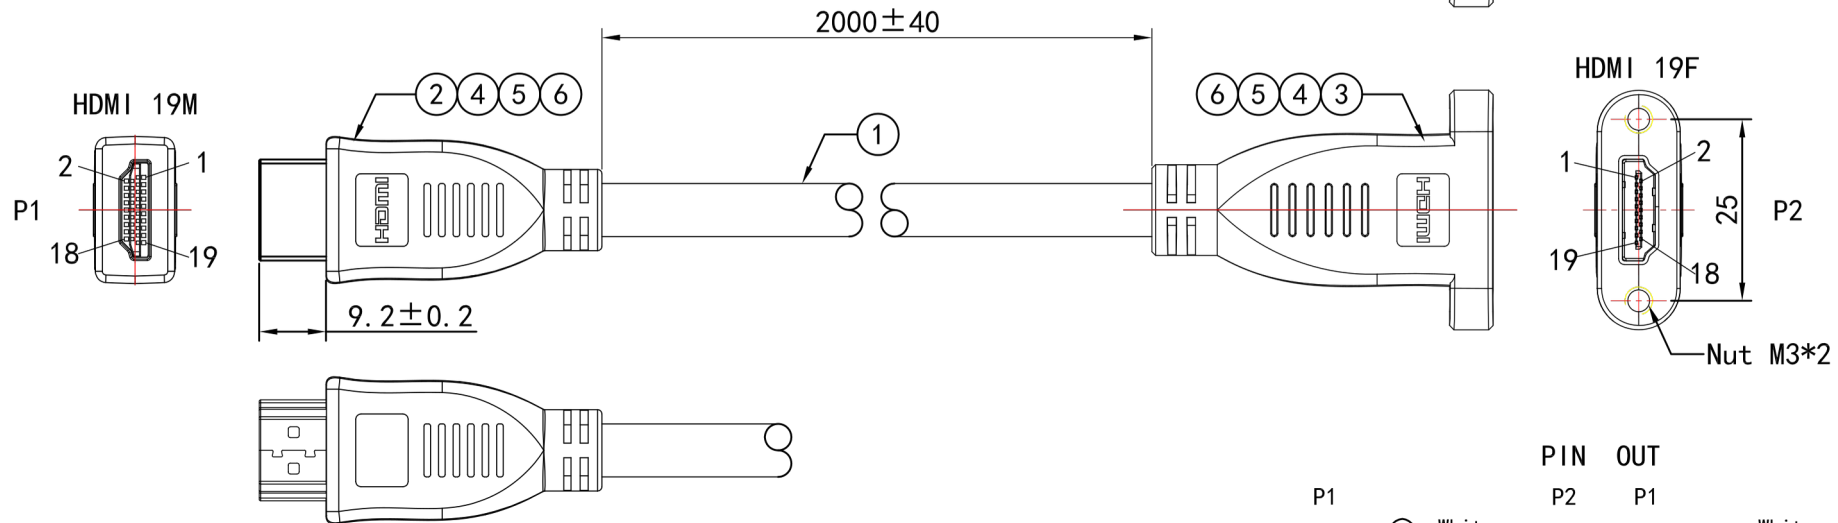

NOTE:

1. 100% OPEN & SHORT WIRE TEST;
2. CONTACT RESISTANCE 5ohm Max;
3. INSULATION RESISTANCE 5M ohm Min;
4. HI-POT DC 300V/10mS;
5. ALL the Material shall be according to ROHS & REACH;

PIN OUT			
P1		P2	
1	White	13	White
3	Red	14	White
2	Drain	19	Black
4	White	17	Drain
6	Green	15	Yellow
5	Drain	16	Orange
7	White	18	Red#28
9	Blue	SHELL	Drain+Braid
8	Drain		SHELL
10	White		
12	Brown		
11	Drain		

7	NUT	NUT M3 NICKEL-COPPER	2PCS	
6	OUT-MOLD	PVC 45P BLACK (UL94V-0)	12G	
5	IN-MOLD	PE	6G	
4	COPPER	COPPER FOIL T:0.65*W:25*L:45MM	2PCS	
3	CONN 2	HDMI FEMALE PIN/1U" BLACK NICKEL-SHELL	1SET	
2	CONN 1	HDMI MALE PIN/1U" BLACK NICKEL-SHELL	1PCS	
1	CABLE	UL20276 (HDMI Cable) (1P#28+EAM)*5C+1P#28+2C#28+AL+D (7/0.127BC)+B (16/6/0.12AM) OD:7.3MM BLACK L:2080MM	1PCS	
NO.	MATERIAL. P/N	DESCRIPTION	Q' TY	



東莞市隆凱電子有限公司
Dongguan Lungkay electronics co., LTD

UNLESS OTHERWISE SPECIFIED
TOLERANCE
x. ± ; x.x ± ; angles ± ;

DRAWN: Helen
CHECKED: B. Tomic
APPROVED:

DESCRIPTION:			
HDMI 19M/HDMI 19F--NL:2000MM			
CUSTOMER P/N:		SCALE: NONE	
PRODUCT NO.:		SHEET: 1 of 1	
DWG NO:		DATE: 25.07.25	
REV: X/1		UNIT: mm	