



REV.	DESCRIPTION	DATE
△		
△		

RoHS

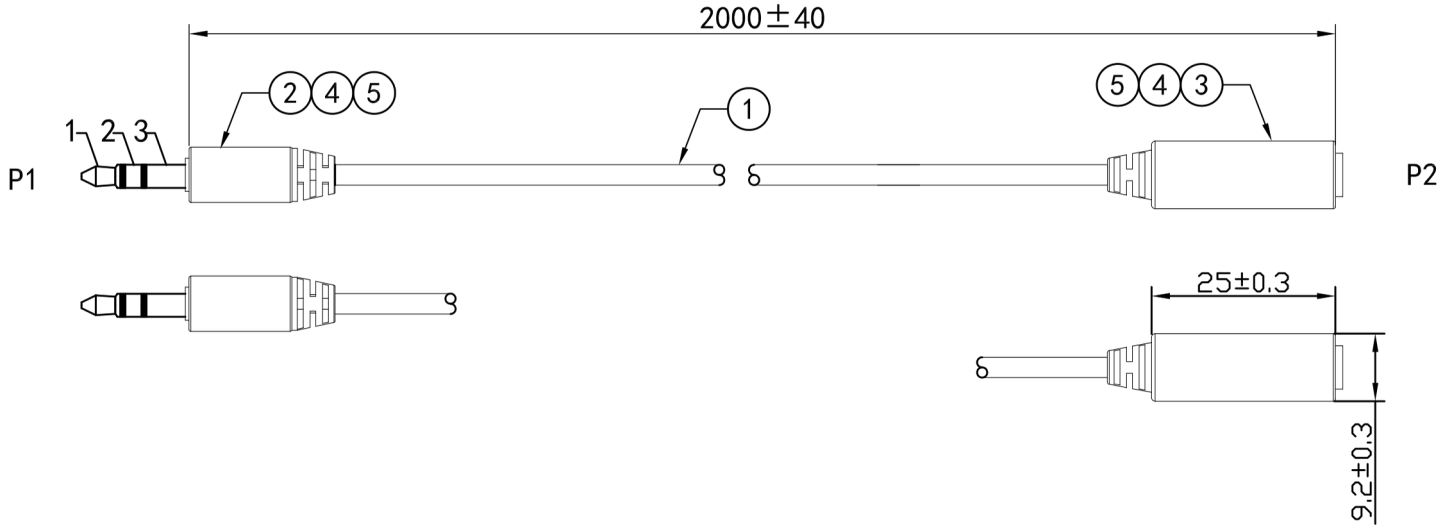

- NOTE:
- 100% OPEN & SHORT WIRE TEST;
 - CONTACT RESISTANCE 2ohm Max;
 - INSULATION RESISTANCE 10M ohm Min;
 - HI-POT DC 300V/10ms;
 - ALL the Material shall be according to ROHS & REACH;

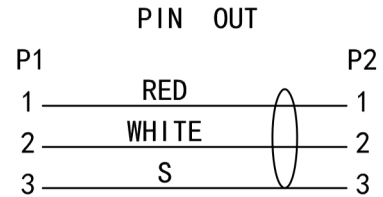

5	OUT-MOLD	PVC 45P BLACK	8G	
4	IN-MOLD	PE	4G	
3	CONN 2	ST-3.5 FEMALE BLACK AU-SHELL Ø8.0MM	1PCS	
2	CONN 1	ST-3.5 MALE BLACK AU-SHELL Ø6.0MM	1PCS	
1	CABLE	NON-UL 2C#28 (7/0.12TC) +S (46/0.10TC) OD:2.5MM BLACK L:2000MM	1PCS	
NO.	MATERIAL. P/N	DESCRIPTION	Q' TY	

東莞市隆凱電子有限公司
Dongguan Lungkay electronics co., LTD

E540931
C US

UNLESS OTHERWISE SPECIFIED

TOLERANCE		DESCRIPTION:	
x. ±	; x.x ±	ST-3.5/ST-3.5延长线-L:2000MM	
x.xx ±	; angles ±		
DRAWN:		CUSTOMER P/N:	
CHECKED:		PRODUCT NO.:	SCALE: NONE
APPROVED:		DWG NO:	SHEET: 1 of 1
		REV: A/0	UNIT: mm DATE: 24.09.25