


REV.	DESCRIPTION	DATE
△		
△		

RoHS



E540931

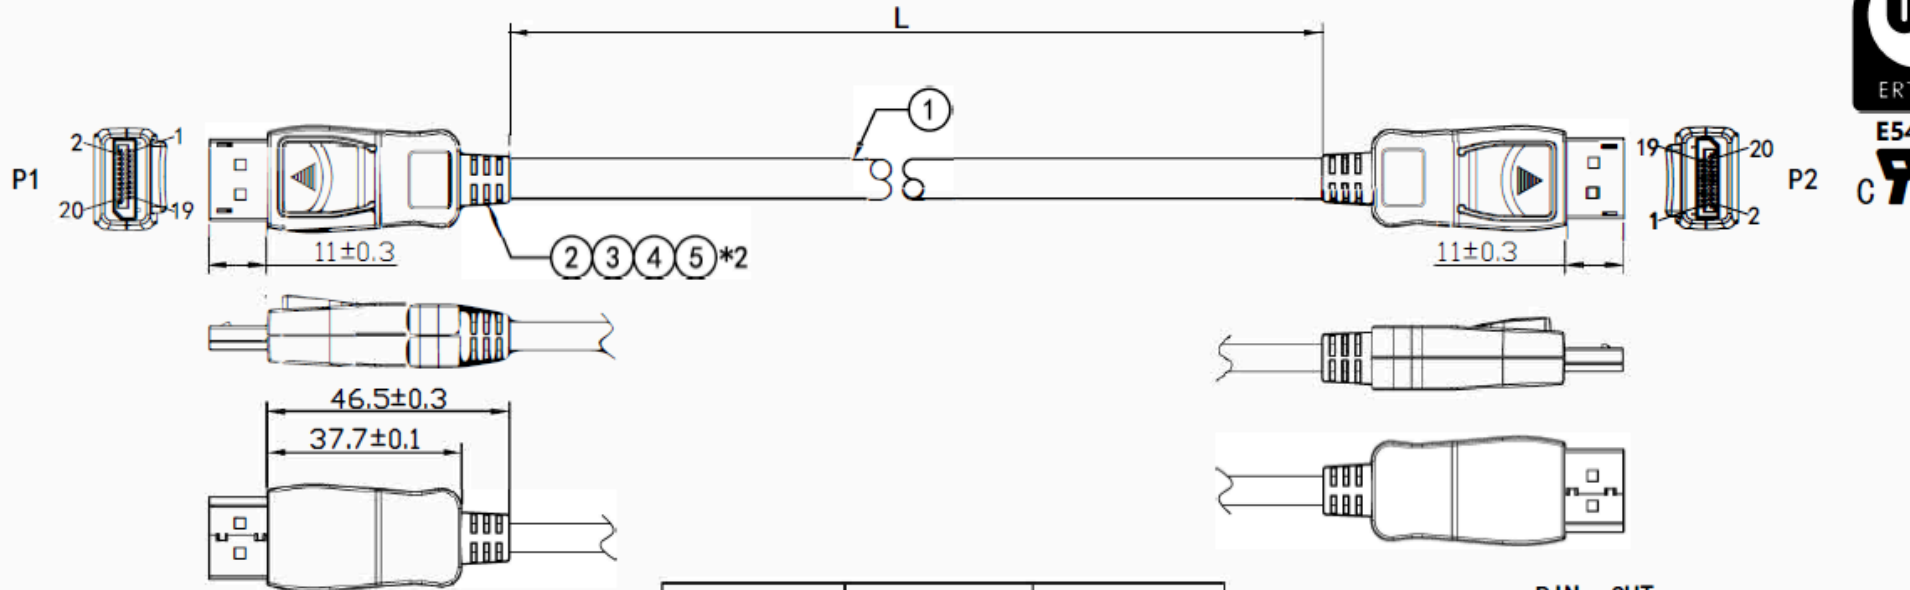

Part NO:	Length (mm)	PE Bag (mm)
111211	500±15MM	140*180*0.05
111212	1000±30MM	150*200*0.05
111213	2000±40MM	150*200*0.05
111214	3000±60MM	180*240*0.05
Note: Custom length can made		

P1		P2	
1	White	12	White
3	Red	10	Green
2	Drain	11	Drain
4	White	9	Yellow
6	Green	7	White
5	Drain	8	Purple
7	White	6	Green
9	Blue	4	20
8	Drain	5	SHELL
10	White	3	SHELL
12	Black	1	SHELL
11	Drain	2	SHELL

- NOTE:
- 100% OPEN & SHORT WIRE TEST;
 - CONTACT RESISTANCE 5ohm Max;
 - INSULATION RESISTANCE 5M ohm Min;
 - HI-POT DC 300V/10mS;

NO.	MATERIAL. P/N	DESCRIPTION	Q'TY
5	OUT-MOLD	PVC 45P BLACK (UL94V-0)	12G
4	IN-MOLD	PE	6G
3	COPPER	COPPER FOIL T:0.65*W:25*L:45MM	2PCS
2	CONN 1	DP MALE PIN/1U" BLACK, AU-SHELL, WITH ABS HOOD	1SET
1	CABLE	UL20276 (DisplayPort Cable) (1P#32+EAM)*5C+4C#32+1C#28 +AL+D+B(16/5/0.12AL) OD:5.5MM BLACK(100Ω) L:xxxxMM	1PCS

STSTALIJA

E540931

東莞市隆凱電子有限公司

Dongguan Lungkay electronics co.,LTD

UNLESS OTHERWISE SPECIFIED TOLERANCE: x.xx ± ; x.x ± ; angles ± ;

DRAWN: Helen	DESCRIPTION: DisplayPort 20P/DisplayPort 20P-4K Cable
CHECKED: B. Tomic	Part Number: 11121X
APPROVED:	DWG NO: 20240906-02 Scale: None Sheet: 1 of 1
	Rev: X/0 Unit: MM Date: 24.11.26